




## 安装外形图 Overall dimension

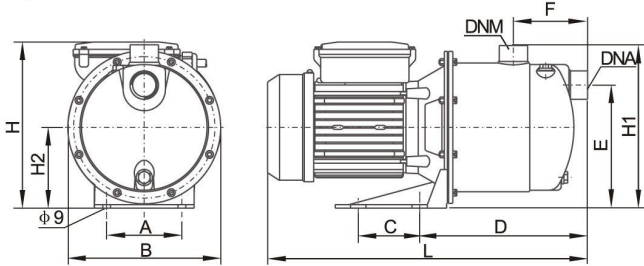

型号 Model	外形尺寸 Shape size (mm)										
	A	B	C	D	E	F	L	H	H1	H2	
WZ1.5-20	100	170	—	197	128	88	365	182	178	88	
WZ2.2-22	98	184	—	160	148	80	354	206	202	98	
WZ2.4-25	98	184	—	160	148	80	354	206	202	98	
WZ3.0-30	98	198	80	219	160	97	417	216	212	105	



## 性能曲线 Performance curves

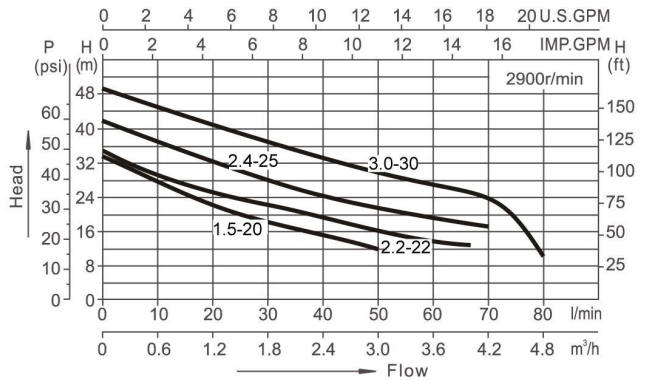

热保护器  
Thermal protector

单相  
Single phase

绝缘等级  
Insulation

F

防护等级  
Protection

IP55

最大吸程  
Max. suction head

9M

**WZ1.5-20**      **WZ2.4-25**

**高效 节能 坚固 耐用**

High efficiency / Energy saving / Sturdy / Durable

## 技术参数列表 Technical parameter list

型号 Model	输出功率 Power(P <sub>2</sub> ) kW	电流 (Amps)		额定扬程 Rated head (m)	额定流量 Rated flow (m <sup>3</sup> /h)	DNA	DNM	重量 (Kg)	包装尺码 Packing size (mm)	装柜数量 (Qty/20')
		220V/50Hz	380V/50Hz							
WZ1.5-20	0.37	2.4	1.0	20	1.5	G1	G1	7	390×195×235	1570
WZ2.2-22	0.55	3.8	1.4	22	2.2	G1	G1	9	385×200×280	1300
WZ2.4-25	0.75	5.2	1.8	25	2.4	G1	G1	10	385×200×280	1300
WZ3.0-30	1.0	6.2	2.4	30	3	G1	G1	11.8	460×215×315	1000

### 工作条件

介质温度: 0~+50℃  
环境温度: <50℃  
最大工作压力: 0.8MPa

### Working conditions

Medium temperature: 0~+50℃  
Environmental temperature: <50℃  
Max. working pressure: 0.8MPa

序号 NO.	名称 Name
1	螺塞 Plug
2	垫圈 Washer
3	防尘盖 Dust cap
4	内六角螺栓 Inside hexagonal bolt
5	泵壳组件 Pump housing component
6	O形圈 O-Ring
7	O形圈 O-Ring
8	射流器总成 Ejector
9	平键 Key
10	导叶 Difusser
11	六角螺母 Hexagonal Nut
12	弹簧垫圈 Spring washer
13	叶轮 Impeller
14	机械密封 Mechanical seal
15	泵盖 Pump cover
16	电机 Motor

